


PICA FLX

The PICA FLX is a PICA variant that offers targeted lighting ideal for nest training or reducing floor eggs.

With its easy clip-and-secure installation, provides effortless setup and adjustable positioning, making it a practical and affordable choice for enhancing poultry environments.

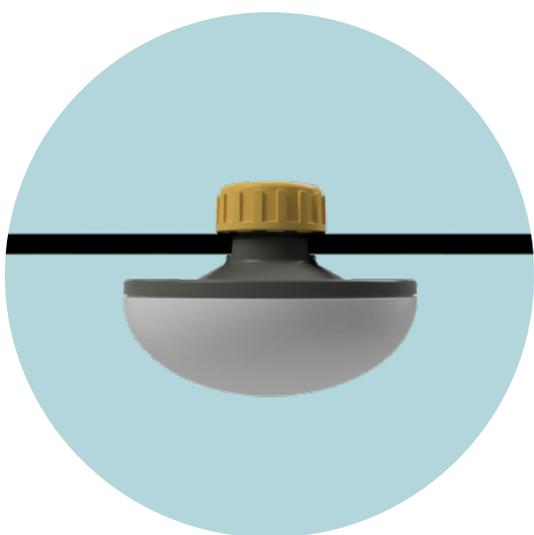

Operating voltage:	48Vdc
Connection:	Flat cable (H05RNH2-F)
Light source:	LED
Flicker-free:	Yes, with HATO Powerpack
Dim range:	0-100%
CRI:	>80
Operating temperature:	-10°C (14°F) <Ta< +40°C (104°F)
Storage temperature:	-25°C (-13°F) <Ta< +80°C (176°F)
Base material:	PC
Cover material:	PC
IP:	67
Expected average lifetime:	50.000h - L80 B10 @25°C*
Warranty:	3 years**
Application:	Poultry

Barcode:	Net weight:	Power consumption:	Light output:	Efficacy:	Maximum numbers of lamps on one line (100m):	Light colour CCT:	Made in:
7864	53gr	1.6W	230lm	144lm/W	80	3000K	China

* Lifetime definition & measurement available upon request

** Ask your sales representative for the product specific warranty terms and conditions

PICA FLX

Included accessories



HATO GRIP big
7551

Additional accessories




PICA FLX Cable Junction
7909



PICA FLX Cable End Fixture
7910




PICA FLX Cable Fixture
7908



PICA FLX Cable
7906

Dimensions

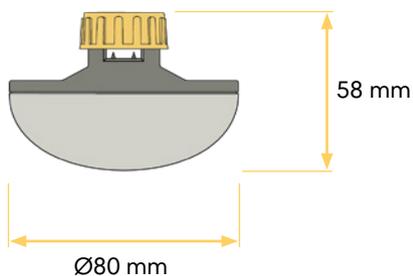


Packaging information

Box Size (LxHxW):	390 x 390 x 375mm
Number of units per box:	100 pcs
Box weight:	9.4kg - 20.72lbs

PICA FLX


Installation example

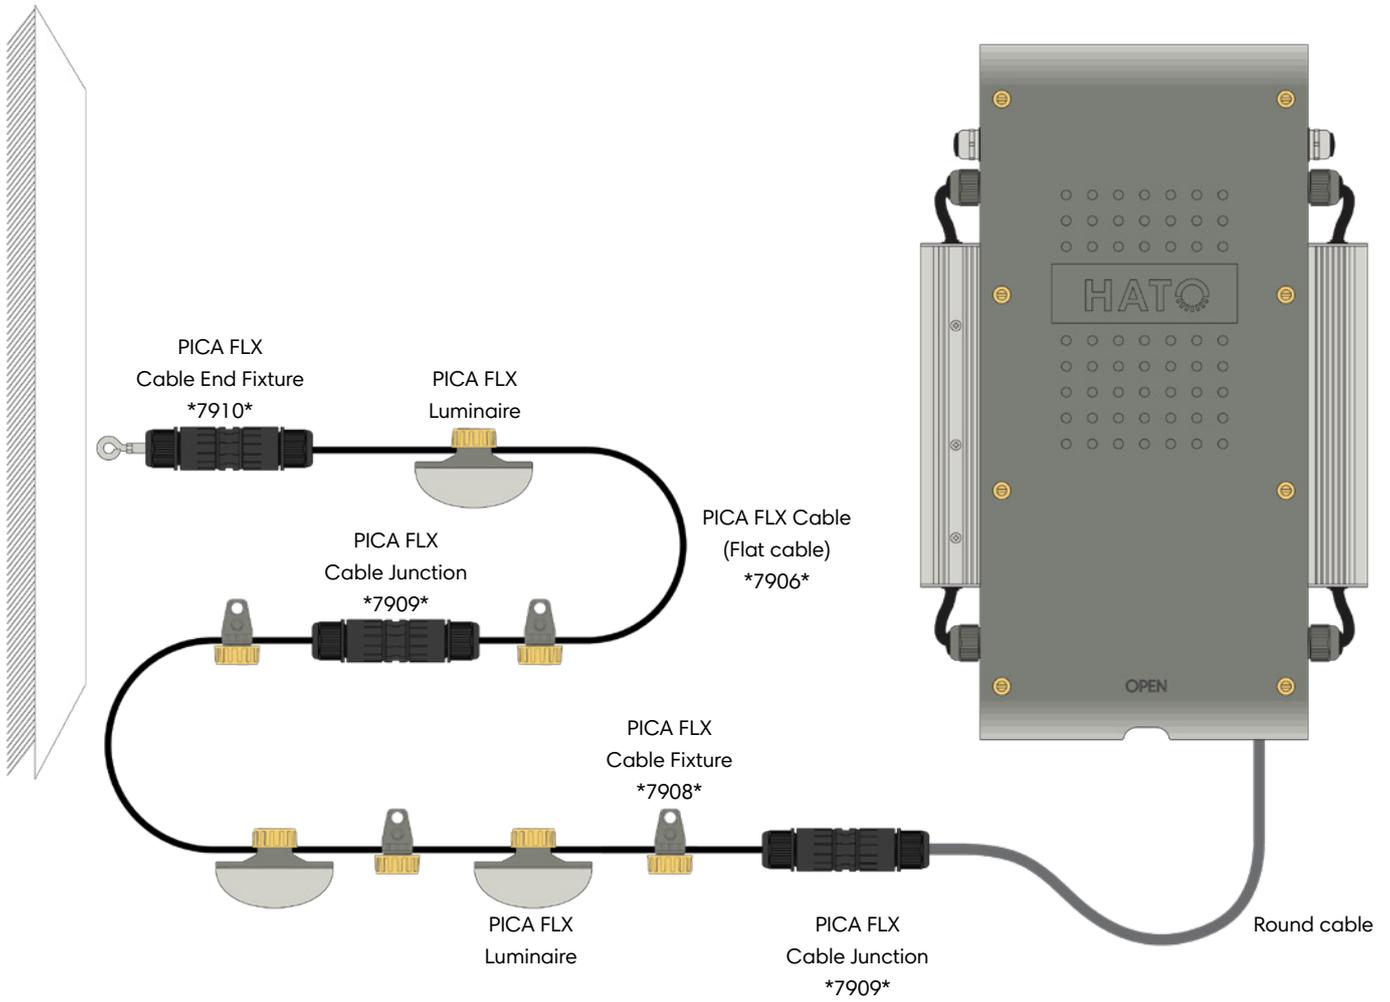

Use HATO POWER PACK with SMART E-FUSE
Use one cable fixture (*7908*) every one meter

PICA FLX

Light spread

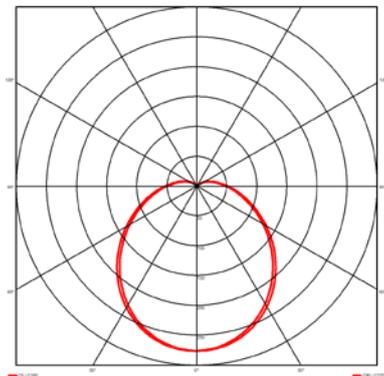

Markings



* Protection test against penetration of water IPX7
(protect against the effect of immersion between 15cm and 1 meter)